



# www.outdoorclassrooms.co.uk

Fitting notes for:- stobb seats

**Pack contents:** 6 stobb seats

**Tools required for fitting:-**


Digging Equipment  
Materials for seat fixing

Before any digging is carried out it is important to make sure there are no existing services buried beneath the desired placement points, i.e. electric, gas, water or drainage pipes. (Look for existing manhole covers as a clue.)

Check existing plans for services.

Place the seats where you wish to site them, rounded ends up.

Make sure required gap between other structures and the stobb seats is maintained on all sides. Using a spade, mark closely around the legs. Move the seats to one side whilst digging the holes.

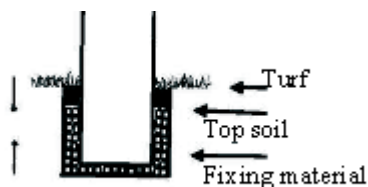

Remove turf and place aside for later use. The holes should be fractionally wider in diameter than the seat and set in about 30cm. Set in with appropriate materials and reinstate the turf.

For the longevity of the stobb seats apply boiled linseed oil to the wood when the weather is dry, twice to three times a year for best results.

If you require any further advice please contact us on 0113 2556342.

