



www.outdoorclassrooms.co.uk

Fitting notes for:- Sundial

Pack contents: Sundial


Tools required for fitting:-

- Digging Equipment
- Fixing materials
- Compass
- Spirit level

Before any digging is carried out it is important to make sure there are no existing services buried beneath the desired placement points, i.e. electric, gas, water or drainage pipes. (Look for existing manhole covers as a clue.)

Check existing plans for services.

It is best to set the sundial in during a sunny day. Place the Sundial where you wish to site it, considering shade cast by buildings and trees as the sun moves. Using a spade, mark closely around the leg. Move the sundial to one side whilst digging the hole. Remove turf and place aside for later use. The hole should be fractionally wider in diameter than the leg.

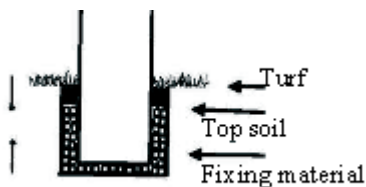

Carefully lower the Sundial into the hole. The line to the 12 o'clock needs to be set exactly north. (Bear in mind that the time will be one hour different depending on British Summer Time or Greenwich Mean Time). Look to see if it is level, using the spirit level on the side of the post if necessary and adjust as appropriate. Set in with appropriate materials and reinstate the turf.

For the longevity of the sundial you may need to apply more varnish periodically.

If you require any further advice please contact us on 0113 2556342.

